


Soundbar Demonstrator

4K Soundbar Demonstration Player With Dolby Atmos Support

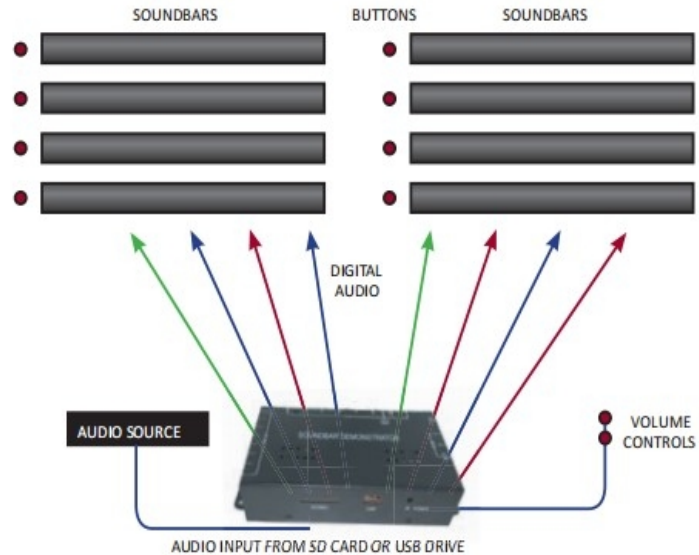

Highlighted Features

- >Demonstrates up to eight soundbars
- >Keep-awake prevents soundbars from Entering sleep mode.
- >Durable buttons for volume and product Selection.
- >Supports audio source Dolby /AC3 high bitrate files.
- >Supports soundbars with Dobby decoder
- > TV demo mode toggles each position between TV sound and soundbar - visit website for details.

Tech Spec

Video Output:
v2.0 HDMI™ up to 4k/60Hz;
Status Display:
Status, LAN, Power LED
Audio Output:
Digital: Embedded in HDMI
Digital/Toslink: Optical
R/L Analog
Control I/O: SD card ; USB 2.0 Host x 2 ;
RJ45x1 ; 3.5mm Audio ; HDMI2.0 x1;12V
DC-in x1; 12V DC-Out x1; IRx1; SPDIFx8; V+;
V-; On/Off ; RJ11 Push Button GPIOx 11;
UARTx1; (Dobby Atmos Version with
HDMIx4).USB Upgrade x1;
Network Connection:
LAN: 10/100M, R J-45
WiFi: 802.11 b/g/n (optional antenna)
Video Format Support:
H.265, HEVC MPEG2: MP@HL MPEG4.2:
ASP@L5, MPEG4.10 (H.264):MP@L4.0
VC-1: AP@L3 WMV9

User Experience (Shopper & Retail Integrators)

The MP10 provides a perfect demonstration solution while driving immersive 1080P video and Digital audio for a loss-free high-quality soundbar demonstration kiosk.

The MP10 will auto play demo video files from the root of SD card or USB drive in a loop. The audio is sent to demo TV at default. The user can press one of the eight push button selectors to start demo mode: the sound is toggled into the corresponding soundbar for 30 seconds.

Audio Format:

MPEG1: Layers I, II, III (MP3)2.0
MPEG4: AAC-LC 5.1, HE-AAC 5.1
WMA9: w2.0
Processor:
CPU: Quad-core 64-bit ARM® Cortex™ -A53 up to 2GHz
GPU: Penta-core ARM® Mali™ -450
Memory &Storage Options:
RAM: 512M / 1GB;
ROM: 4 GB SD Card;
SD: 8, 16, 32, GB;
USB Drive: 2 to 32 GB;
Network Protocol Support:
IP•TCP•UDP•ICMP•ARP•DHCP•HTTP•FTP
IGMP•RTP•SNMP•NTP•DNS
Power:
Input voltage:12VDC (POE Optional)
Power dissipation: 6 watts (max)
AC/DC Adapter: 100-240 V 50/60Hz
General:
Dimensions: 179.4(L)x94.2(W)x50.2(H)mm
Unit Weight: 635g